




RTD WITH CABLE

R-202

RTD Element		A	Pt-100x1, Simplex
		B	Pt-100x2, Duplex
		O	Consult Factory
Junction Style		W2	2- Wire
		W3	3- Wire
		W4	4- Wire
Sheath "OD"		3	Ø3mm
		4.5	Ø4.5mm
		6	Ø6mm
		8	Ø8mm
Sheath Material		316	SS 316
		310	SS 310
		600	Inconel-600
ANGLE "Φ"		A	110°
		B	135°
		Other	Consult Factory
Length "A"			
Length "B"			
Length "C"			
Type of Cable		A	Teflon/Teflon Insulated Flexible Cable
		B	Teflon Insulated & SS Braided Flexible Cable
		C	FG/FG Insulated Flexible Cable
		D	PVC/PVC Insulated Flexible Cable
		Other	Consult Factory
Cable Length			

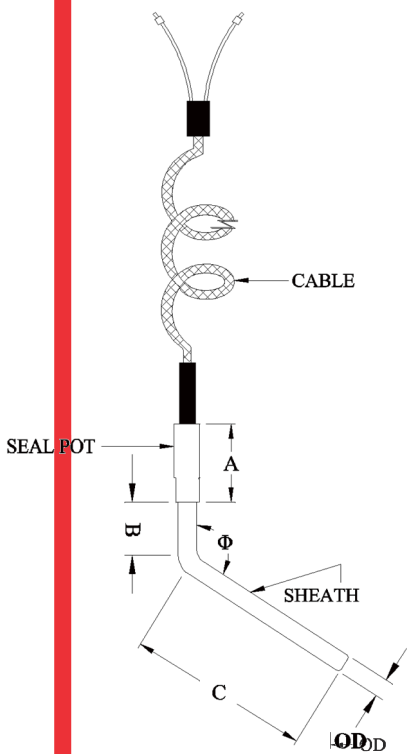

Temperature Sensor Technology