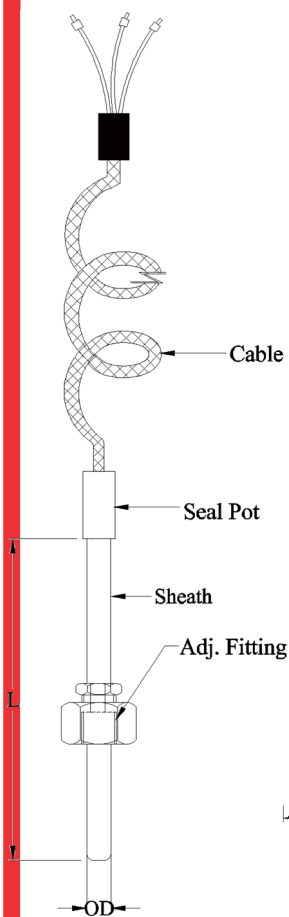


RTD WITH CABLE & ADJ. FITTING

R-205


RTD Element

A	Pt-100x1, Simplex
B	Pt-100x2, Duplex
O	Consult Factory

Junction Style

W2	2- Wire
W3	3- Wire
W4	4- Wire

Sheath "OD"

3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm

Sheath Material

316	SS 316
304	SS 304
Other	Consult Factory

Fitting

Threads B.S.P. / N.P.T.	1/2"
	3/4"
	3/8"
	1"
M-Thread	M20X1.5, M18X1.5, M33X2.M27X2.
Other	Consult Factory

**Spring Length
"L1"**

**Inset Length
"L2"**

**Nominal Length
OF RTD (L)**

Type of Cable

A	Teflon/Teflon Insulated Flexible Cable
B	Teflon Insulated & SS Braided Flexible Cable
C	FG/FG Insulated Flexible Cable
D	PVC/PVC Insulated Flexible Cable
Other	Consult Factory

Cable Length

Temperature Sensor Technology